


# M56L door

Laboratory measurements of sound insulation of the Merford type M56L door

Laboratory: Cauberg-Huygen Zwolle  
 Test element: door type M56L  
 Manufacturer: Merford Special Doors

Project nr.: 991169-1A  
 Area, S, of test element: 2,0 m<sup>2</sup>  
 Mass per unit area M56L: 68 kg/m<sup>2</sup>  
 Receiving room volume: 89 m<sup>3</sup>

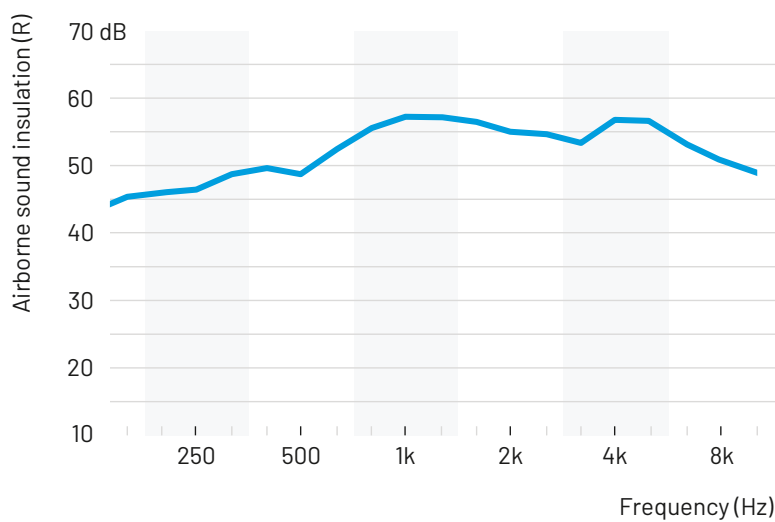

Sound insulation measurements on M56L door took place in a laboratory. Single leaf, size 950 x 2100 mm, with threshold H=48 mm, 2 pcs compression type latches, no vision panel. Different leaf configuration, door size, threshold, locks, vision panels, etc. will affect sound insulation values.

Rating in accordance with ISO 717-1:  $R_w = 56$  dB  
 C -1 dB  
 Ctr -2 dB

The M56L door has no fire rating.

Frequency (Hz)	R 1/3 oct (dB)	R 1/1 oct (dB)
50	33,1	
63	32,6	34,2
80	39,5	
100	41,0	
125	43,8	43,0
160	45,3	
200	46,2	
250	46,7	47,1
315	48,8	
400	49,6	
500	48,8	50,0
630	52,5	
800	55,4	
1000	57,1	56,4
1250	57,0	
1600	56,5	
2000	54,9	55,4
2500	54,8	
3150	53,7	
4000	56,8	55,4
5000	56,4	
6300	53,5	
8000	50,8	50,9
10000	49,4	

Despite the careful composition of this product sheet, no rights can be derived from this. We reserve the right to make changes. For the most current version, please contact our sales department or visit merford.com.